


– 6

3.036.010

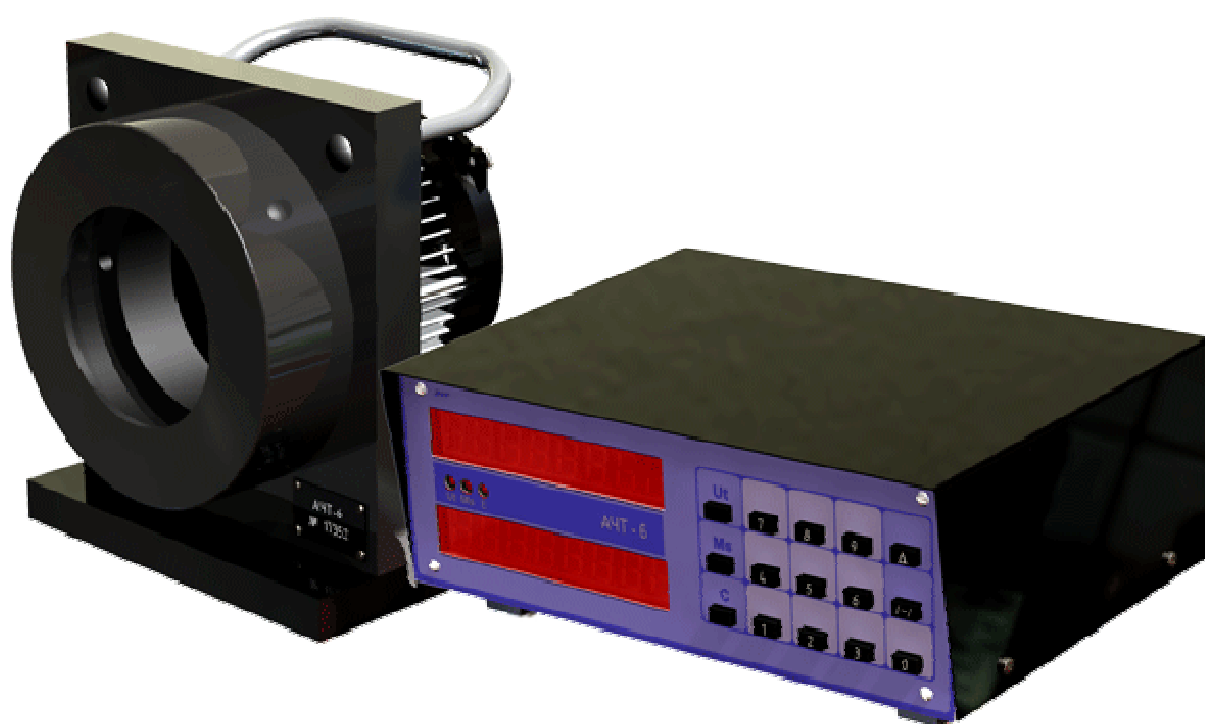

( ) .

-6 3.036.010

20° , ° , % -20 ... +60  
85  
-20 - +50  
175 - 260


(-20..10) 0.2  
(0...60) 0.15  
(60...110) 0.2

+5° , ° 0.02

USB  
225\*170\*90  
150\*170\*140

t°

:

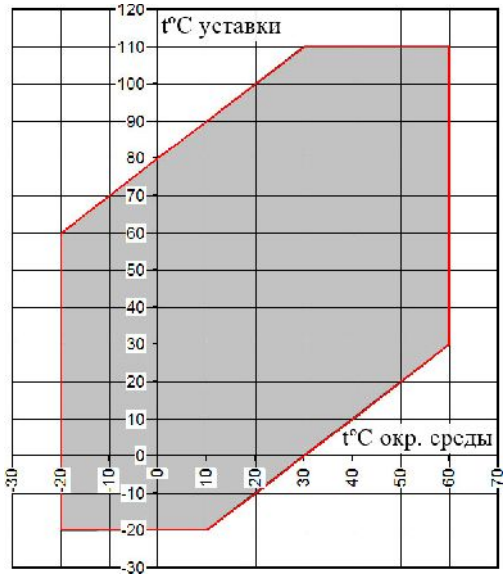


- 
- 

;

(


);

[Ut].

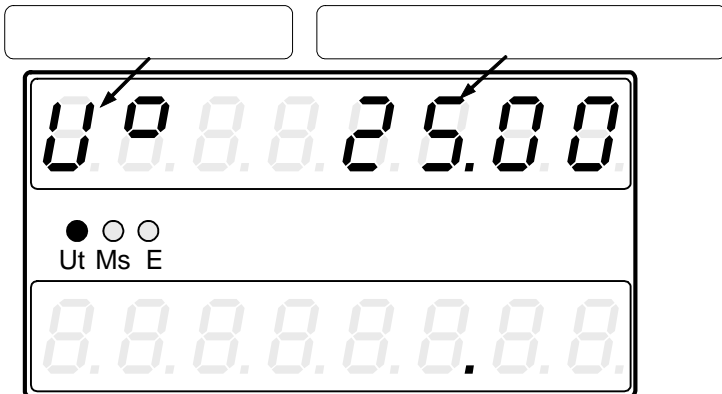

[Ut]


[ ]

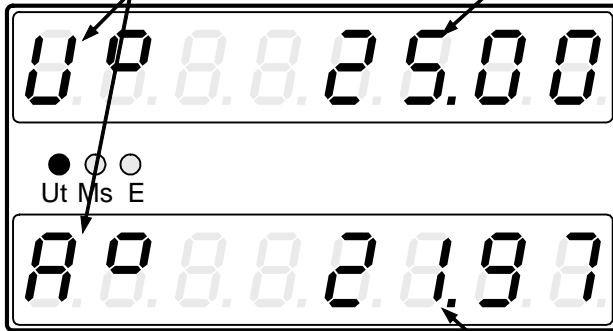

(Ut).

(E).


1 °

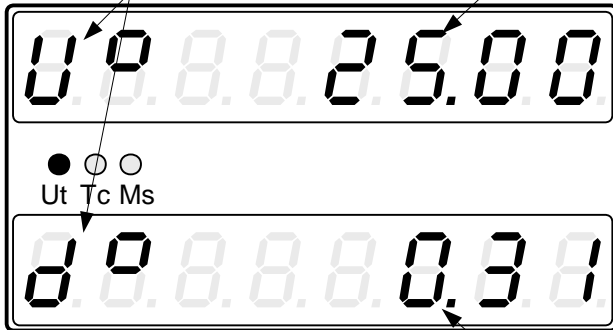

( )

[Ms].

(Ms).

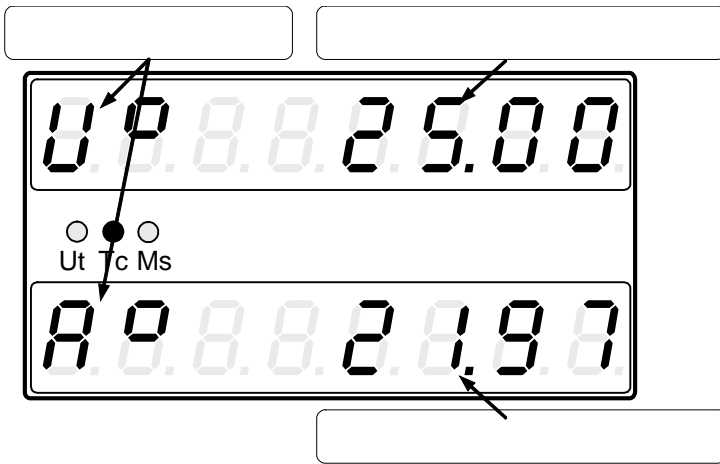

USB.  
FT232BM

FTDI.

USB

<http://www.ftdichip.com>.

19200

, ASCII.

USB  
, 1

1

:# -

,@ -

0-FF (Hexadecimal);

: ASCII

:

-6

: -0 0D.

BB,

«78-12»

78.

( ) ( ) [ ] <CR>

: [ ]

1:

: #BBM0<CR>

: !BB<CR>

#

BB

M0

<CR>

: 0x0D

:  
 - : ASCII !, >, ?;  
 - : ASCII 0-FF (Hexadecimal);  
 « »  
 : ;  
 : -0 0D.

( ) [ ] < R >

- :  
 1.  
 2.  
 3.  
 4.

?[ ] <CR>

**-6**

« »

: #BBM0 <CR>  
 : !BB <CR>

: #BBM1 <CR>  
 : !BB <CR>

: #BBU±ddd.dd <CR>  
 ±ddd.dd - -20...120(  
 )  
 : !BB <CR>

---

: @BBM <CR>  
 : !BBn <CR>

n - (0 1)

: @BBT <CR>  
 : > ±ddd.dd <CR>  
 ±ddd.dd - ( )

•  
: @BBU <CR>  
: > ±ddd.dd <CR>  
±ddd.dd – ( -  
)

•  
: @BBA <CR>  
: > BB <CR>  
BB – .

70° ,

+20°

+30°

90°

0.01°C ( -  
~0.001° ).

1000 ,

3.

" "

( , . . . ),

220 .

!



-6

18

10 .

-6

\_\_\_\_\_

\_\_\_\_\_ .

\_\_\_\_\_ ( )

-6	4.036.010-1	1	
-6	3.036.010-2	1	
		1	
« - »		1	
		1	
		1	
	3.036.010	1	

**ЭП** 630054, " " , 14

/ (383)-353-96-82  
E-mail: [elir@mail.ru](mailto:elir@mail.ru)  
Http:// [www.elir.ru](http://www.elir.ru)